

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 949 068 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
13.10.1999 Bulletin 1999/41

(51) Int Cl.<sup>6</sup>: B32B 35/00, B29B 17/02  
// F16L9/147

(21) Application number: 99610027.7

(22) Date of filing: 07.04.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Erling, Gorges  
4000 Roskilde (DK)  
• Frederiksen, Jorgen  
3400 Hillerød (DK)

(30) Priority: 08.04.1998 DK 051398

(71) Applicant: Den Nyttige Krukke A/S  
3400 Hillerød (DK)

(74) Representative:  
Plougmann, Vingtoft & Partners A/S  
Sankt Annae Plads 11,  
P.O. Box 3007  
1021 Copenhagen K (DK)

### (54) Separation of insulated pipes

(57) The present invention concerns an automated method and an apparatus for separation of pipes comprising a tube pre-isolated on the outer side with a foamed material comprising CFC, by deforming the pipe. The pipes may be of different diameters and cross-sectional forms as well as bend pipes, pipes having T-pieces, elbows, etc. A substantial part of the CFC gasses is released during the pressing process and is removed by suction and captured in a filtering means.

The apparatus for separating pipes comprises first and second pressing surfaces being arranged during the separation process so that they substantially are facing each other, means for moving the pressing members towards each other with a force sufficient to permanently deform a pipe placed in between, and suction means for removing CFC gasses being released during the separation process from the region around the pressing surfaces. The suction means are coupled to filtering means for capturing the CFC gasses.

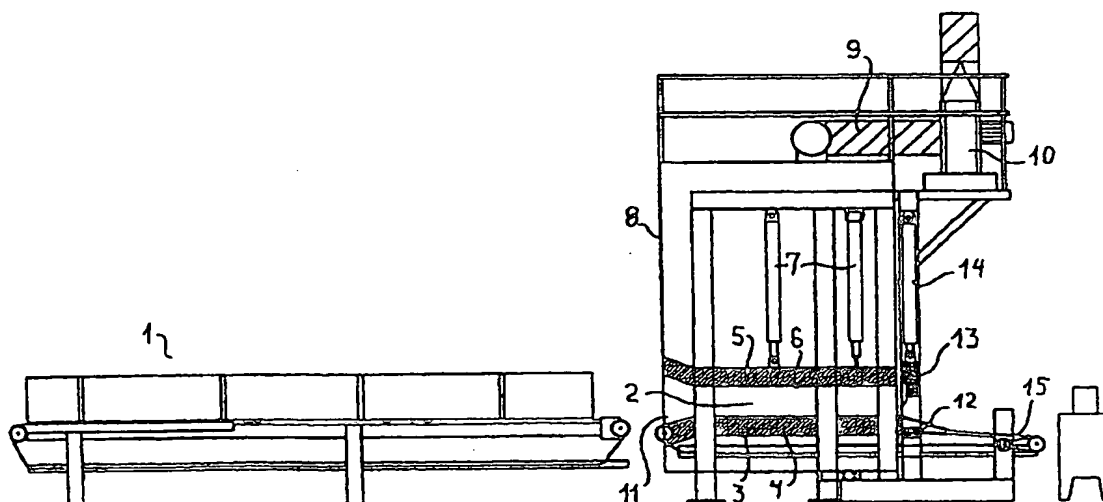


Fig. 1

EP 0 949 068 A2

## Description

[0001] The invention concerns an automated method and an apparatus for separation of pipes comprising an inner tube and an outer layer by pressing the pipe into deformation. The same apparatus may be used for pipes of different diameters as well as bend pipes.

[0002] The invention concerns in particular a method and an apparatus for separation of pipes of which the outer layer is made from a foamed material comprising CFC gasses, especially R11 and R12. A substantial part of the CFC gasses is released during the pressing process and is removed by suction and captured in a filtering means adapted for absorbing CFC gasses.

## Background

[0003] The different layers of pre-isolated pipes that e.g. have been used for distribution of district heating, need to be separated from each other before recycling of and/or disposal of the materials that the pipes comprise. The pipes in question comprise an inner tube, usually made from a metal such as steel and one or more outer layers of which at least one is an isolating layer, usually made from a foamed material, and optionally a sheath, usually made from a hard plastic material such as polyvinyl chloride polymer (PVC) or high density polyethylene (hd-PE).

[0004] The pipes and/or the inner tubes may have any cross-sectional shape such as round, square, triangular, oval, etc., but the most common shape is round.

[0005] Disposing of pipes that are isolated with a foamed material is a particular problem since the foamed material and the outer sheath often are made from materials of high combustibility, such as polyurethane, and it will therefore in the near future almost certainly become very difficult to obtain permission to dispose the pipes on dumping grounds in most countries.

[0006] The foamed material may involve a problem when the components of the pipes are separated. The most common foaming agent that was used until about 1990 is CFC gasses, known as R11 and R12. These gasses are contained within the foam and tests show that a large part of the gasses will be released during a separation process. This presents a problem for separation processes, since the release of CFC gasses to the atmosphere is unwanted for environmental reasons.

[0007] Another problem for the process of separating pipes is that the pipes often have bends and/or dents due to the installation they have formed part of, or due to the dismantling process. Furthermore, the pipes are often connected to T-pieces, elbows, muffs and/or expansion joints, that are time-consuming to remove manually from the pipes. Therefore, the method and apparatus for the separating process have to be flexible to the shape of the pipes. Further, the pipes to be disposed are often of different diameters, both with regard to the

outer diameter of the pipe and the diameter of the inner tube for which reason it is highly desirable for a method and an apparatus for separation of pipes that they are flexible to these parameters.

[0008] The pipes to be separated comes in different length and a method and an apparatus for separation of pipes should preferably be able to handle pipes of various lengths.

[0009] Known separation methods comprises manual separation where the isolating layer is scraped from the inner tube manually. Manual separation is mostly used when the inner tube is being reused and the method is highly labour-consuming. Another method is shredding in which the pipe is broken down into small pieces that subsequently are sorted but it is very difficult to prevent released gasses from entering the atmosphere in this process. A third known method is to force the pipe by hydraulic means through a die that fits with the outer surface of inner tube so that the outer layer is scraped from the inner tube. A special die have to be supplied for each diameter of the inner tubes and the method can only be applied to substantially straight pipes without bends or dents. The third known method may only for practical reasons be applied to pipes with a maximum length of approximately three meters.

## Description of the invention

[0010] It is an object of the invention to provide an automated method and an apparatus for separation of isolated pipes that may be applied to pipes of diameters within a broad range and to pipes with bends or dents and/or T-pieces etc., without adjustment or modification of the method and apparatus.

[0011] It is a further object of the invention to provide a method and an apparatus which includes steps and means for removal of gasses, such as, e.g., CFC gasses, that may be released during the separation process, from the region where the separation process takes place.

[0012] It is a still further object of the invention to provide a method and an apparatus which includes means and steps for capturing of gasses, such as, e.g., CFC gasses, that have been removed from the region where the separation process takes place.

[0013] It is a still further object of the invention to provide a method and an apparatus that is adapted for handling pipes of various lengths.

[0014] It is a still further object of the invention to provide a method and an apparatus with means and steps adapted for loosening parts of the outer layer that still may stick to the inner tube after the primary separation process and/or means and steps for separating parts of the outer layer that still may stick to the sheath material after the primary separation process.

[0015] The invention concerns a method of separating a pipe comprising an inner tube and at least one outer layer comprising the steps of

placing at least a part of the pipe between a first and a second pressing surface, approaching the two pressing surfaces towards each other until both pressing surfaces engage with the pipe, and pressing the two pressing surfaces further towards each other with a force of such magnitude that the pipe is deformed whereby the at least one outer layer of the pipe is separated from the inner tube due to differences in the mechanical properties of the outer layer and the inner tube.

[0016] The mechanical properties of the inner tube may be that it is made from a plastically deformable material, such as one of a number of steel alloys, and may be pressed into a substantially flat member whereas the outer layer may be made from a hard and brittle material, such as polyurethane, that will break into pieces during the pressing process. If the outer layer comprises a foamed material, then most of the cells of this foamed material will break during the pressing process and the gas that have been used as a blowing agent and is comprised within the cells are released from the foamed material as the foamed material is crushed during the pressing step.

[0017] Preferably, the method is applied to pipes wherein the inner tube is a metal tube, such as a steel tube.

[0018] In a preferred embodiment according to the invention, the inner tube is in the pressing step permanently deformed into a substantially flat member. The required pressing force depends on the type and diameter of the tube and of the length of the tube positioned between the pressing surfaces. This length may be from 0.25 meter to 3 or 4 meters, preferably between 0.5 and 2 meters and most preferred between 1 and 1.5 meters. The applied pressing force is for a length of tube of 1 to 1.5 meters from 400 to 900 kN (kilo Newton), preferably from 600-700 kN.

[0019] The process may, for tubes having a hard sheath, prior to the pressing step comprise a step in which the sheath is opened with one, two or more longitudinal cuts so as to ease the pressing process, allow gasses to escape from the foam and the ease the separation of the sheath part from the pipe and foam parts after the pressing process. The cuts may be applied manually or automatically by means of knives, circular saws, etc.

[0020] The method may further according to the invention comprise the step of

applying suction to the region where the separation process is performed so as to remove a substantial part of gasses that are released during the process.

[0021] Furthermore, the air that is sucked from the region where the separation process is performed is in a preferred embodiment according to the invention passed through a filtering means so as to capture a substantial part of the gasses, that are released from the

process and which are removed by suction, in the filtering means, so as to prevent the gasses from contaminating the environment.

[0022] The method may also according to the invention, subsequently to the pressing step comprise the steps of

moving the pressing surfaces away from each other so as to release the pipe from the pressing surfaces, moving the parts of the pipe that have been pressed away from the pressing surfaces, placing the pipe in cutting means, and cutting the pipe so as to separate the parts of the pipe that have been pressed from the remaining part of the pipe.

[0023] The method may also according to the invention further comprise the step of

loosening remaining parts of the at least one outer layer of the pipe from the inner tube by applying loosening means to the pipe.

[0024] The loosening means may comprise two scrapers each comprising an edge and such loosening means are applied to the pipe by placing the edges of the scrapers on each side of the deformed inner tube abutting the flat tube sides where after the tube and the scrapers are moved relatively to each other.

[0025] Alternatively, the loosening means may comprise brushes that may be rotated and such loosening means are applied to the pipe by rotating the brushes while these are in contact with the part of the pipe that have been deformed so as to remove remaining parts of the at least one outer layer from the inner tube.

[0026] The method according to the invention may preferably be performed on pipes of which the outer layer of the pipe is at least partly made from a foamed material.

[0027] The foamed material may comprise polyurethane.

[0028] The foamed material may further comprise CFC gasses which have been used as blowing agent so that the gasses that may be released during the separation process comprises CFC gasses.

[0029] The invention also concerns an apparatus for separating pipes comprising an inner tube and at least one outer layer, the apparatus comprises

a first pressing member having a first pressing surface,

a second pressing member having a second pressing surface, the first and the second pressing surfaces being arranged during the separation process so that they substantially are facing each other, means adapted for moving the pressing members towards each other with a force of such a magnitude that a pipe placed between the pressing surfaces may be permanently deformed, and suction means for removing a substantial part of the

gasses that may be released during the separation process from the region around the pressing surfaces.

[0030] The first and second pressing member are preferably of such a rigid construction that the pressing surfaces are only slightly deformed during the pressing process. The pressing surfaces may be of various shapes so that the apparatus is suitable for treating objects of various shapes and sizes and with bends and dents. The pressing surfaces are in a preferred embodiment of the invention substantially flat and parallel to each other, at least during the pressing process.

[0031] It is understood that the pressing surfaces may be oriented in any direction during the pressing process, horizontally, vertically or in between. Preferably, the pressing surfaces are substantially horizontal, so that the tube may be supported by the lower of the surfaces before the pressing process. However, tilted or vertical surfaces have the advantage that debris from the pressing process may be removed from between the pressing surfaces by the force of gravity.

[0032] The means for moving at least one of the pressing members towards the other pressing member or for moving both pressing members towards each other may be any suitable mechanical means such as hydraulic pistons, pneumatic piston, spindles, etc.

[0033] The suction means may be one or more ventilators, air pumps, blowers, etc.

[0034] The apparatus may further according to the invention comprise a filtering means connected to the outlet of the suction means, the filtering means being suitable for capturing a substantial part of the gasses that may be released during the separation process. The filtering means may be an activated charcoal filter or another suitable filter or it may comprise means for condensing the gasses.

[0035] The filtering means are in a preferred embodiment of the invention suitable for capturing CFC gasses.

[0036] The apparatus comprises in a further preferred embodiment according to the invention a housing enclosing the pressing members and to which the intake of the suction means is connected so as to increase the efficiency of the process of removing a substantial part of the gasses, that may be released during the separation process from the region around the pressing surfaces.

[0037] The apparatus may also in a preferred embodiment of the invention comprise feeding means adapted for automatically feeding the pipe in between the pressing surfaces. The feeding means may be a conveyor with an endless belt or chain that engages the pipe, it may comprise a number of cylinders or balls on which the pipe rolls and drive means for driving the pipe towards the separation region, etc.

[0038] The apparatus may in a preferred embodiment of the invention comprise cutting means suitable for sep-

arating a pressed part of a pipe from a non-pressed part of a pipe. The cutting means may comprise a part with a straight cutting edge and a part with an inclined cutting edge so that the only a part of the inclined cutting edge at a time is engaging the pipe.

[0039] The apparatus may according to the invention further comprise loosening means suitable for removing parts of the outer layer of the pipe from the inner tube after the pressing process.

[0040] The loosening means may comprise two scrapers each with an edge, means for placing the two scrapers one on each side of and abutting the pressed part of the inner tube and means for moving the scrapers and the inner tube relatively to each other.

[0041] Alternatively, the loosening means comprises brushes, means for rotating the brushes, means for placing the brushes on each side of the pressed part of the inner tube and means for moving the brushes and the inner tube relatively to each other.

#### Brief description of figures

#### [0042]

Fig. 1 shows a side view of an apparatus for separation of isolated pipes,

Fig. 2 is a top view sketch showing the principle of an apparatus for separation of isolated pipes,

Fig. 3 shows the knife for cutting the inner tubes, and

Fig. 4 shows the first and the second pressing members of the apparatus.

#### Detailed description of figures

[0043] An embodiment of the apparatus according to the invention is shown in Figs. 1 and 2. The shown device comprises a conveyor unit 1 for feeding the pipes into the separation region 2. The conveyor unit 1 comprises an endless chain specially formed for engaging with and moving the pipes and a drive means for driving the endless chain. The apparatus further comprises a first, stationary pressing member 3 having a first pressing surface 4, a second, movable pressing member 5 having a second pressing surface 6 and means comprising hydraulic pistons 7 for moving the second pressing member 5. The first 3 and second 5 pressing members and the hydraulic pistons 7 are comprised within a housing 8 that is connected with a ventilation pipe 9 to a suction means comprising a ventilator 10, the ventilation pipe 9 being connected to the intake of the ventilator 10. The housing 8 is closed on the top and on the sides and is only provided with openings for entering 11 and exiting the pipes into and from the separation region 2. The function of the housing 8 is to enhance the efficiency

of removing gasses being released during the separation process from the separation region 2 with the ventilator 10. The openings of the housing 8 allow air from the outside to entrain into the housing 8 and create an air stream in the separation region 2 and out through the ventilation pipe 9 and the ventilator 10 so that gasses released during the separation process are carried away or sucked from the separation region 2. The hydraulic pistons 7 apply a pressing force of 65 tonnes, equivalent to about 650 kN.

[0044] The shown embodiment of the invention is designed for pipes with a diameter of the inner tube of 200-800 mm and an outer diameter of the pipe with isolation and sheath of 300-1200 mm, in particular two types of pipes with diameters of the inner tube of 273 mm and 610 mm, respectively, and an outer diameter of 400 mm and 800 mm, respectively, the two types of pipes conforming to the Danish standards DN 250 and DN 608.

[0045] The ventilator 10 has a capacity of 1300 cubic meter air per hour, and the outlet of the ventilator 10 is connected to filtering means 16 comprising activated charcoal filters that are suitable for capturing a substantial part of CFC gasses that may be released during the separation process and are transported from the separation region 2 via the ventilator 10. The filtering means comprise two activated charcoal filters connected in series, each comprising 500 kg activated charcoal being able to absorb about 14 kg of CFC gasses.

[0046] The apparatus further comprises cutting means comprising a stationary first part 12, a movable second part 13 and means for moving the movable second part 13, said means comprising a hydraulic piston 14. The cutting means are placed adjacent to an opening of the housing 8 in substantially the same horizontal plane as the first pressing surface 4 opposite to the conveyor unit 1 so that the part of the pipe that have been pressed after the separation process may be moved out between the first part 12 and the second part 14 of the cutting means so that the cutting means may separate the pressed parts of the pipe from the non-pressed parts of the pipe.

[0047] The apparatus also comprises conveyors 15, 17 for transporting the separated parts of the pipes away from the separation region 2 and the cutting means 12, 13 to a sorting station where the parts are sorted into containing means 18 for metal parts from the inner tube, foamed material, sheath material and optionally other materials, respectively.

[0048] Optionally, the apparatus may also comprise loosening means for loosening remaining parts of the foamed material from the inner tube after the separation process. These loosening means may be placed inside the housing 8 in case the foamed material still contains gasses that may be released during the loosening process so that these gasses may be removed by means of the ventilator 10. The loosening means may comprise scrapers that are moved along each side of the inner

tube that is substantially flat due to the pressing process. The scrapers may be two scraper members each having a scraping edge of at least the same width of the inner tube and adapted for scraping each one side of the inner tube. The scraper members may alternatively each comprise a multitude of spring-loaded fingers placed closely adjacent to each other, each finger having a scraping edge of a more narrow width than the inner tube so as to make the scrapers more flexible to unevenness of the inner tube.

[0049] The loosening means may in another embodiment of the invention comprise brushes that may be rotated by rotation means and are moved along the two sides of the inner tube so as to loosen parts of the foamed material that stick to the inner pipe. The brushes may rotate about axes that are substantially perpendicular to the plane of the flat inner tube or they may rotate about axes that are parallel to the plane of the flat inner tube.

[0050] Optionally, the apparatus may also comprise secondary separation means adapted for separating the foamed material from the sheath material to which it may stick after the separation process. This secondary separation process may be performed inside the housing 8 in case the foamed material still comprises gasses that may be released during the secondary separation process so that these gasses may be removed by the ventilator 10, or the process may be performed somewhere else, such as, e.g., at the sorting station.

[0051] The secondary separation means may comprise scrapers or brushes similarly to the loosening means. Preferably, the secondary separation means comprises two rotatable cylinders between which the sheath material is rolled so as to loosen the foamed material that may stick to the sheath material.

[0052] Preferably, most of or all parts of the apparatus are connected to earth with conductors so as to prevent static electricity on the parts. This arrangement is preferred since the foaming materials and optionally also the sheath materials often are highly inflammable for which reason the apparatus preferably also is equipped with fire fighting and/or fire extinguishing means such as powder extinguishers.

[0053] The cutting means are shown in Fig. 3. They comprise a stationary first part 12 with a first cutting edge 19, a movable second part 13 with a second cutting edge 20 and a hydraulic piston 14 for moving the movable second part 13. The first cutting edge 19 is substantially horizontal whereas the second cutting edge 20 is inclined so that only a part of the inclined cutting edge 20 at a time is engaging with the pipe so as to make the cutting process more efficient and to reduce the demand for cutting force delivered by the hydraulic piston 14. The movable second part 13 is equipped with means 21 for connecting the second part 13 to the hydraulic piston 14. The stationary first part 12 is mounted on vertical beams 22 that constitute a part of a frame. The movable second part 13 is slidably connected to the vertical

beams 22.

[0054] The pressing members are shown in Fig. 4. The first, stationary pressing member 3 has a first pressing surface 4 and the second, movable pressing member 5 has a second pressing surface 6. The stationary first pressing member 3 is mounted on vertical beams 23 that constitute a part of a frame. The movable second pressing member 5 is mounted slidably on the vertical beams 23 and is driven in the vertical direction by hydraulic pistons 7. The lower ends of the hydraulic pistons 7 are connected to the second pressing member 5 and the upper ends of the hydraulic pistons 7 are connected to a horizontal beam 24 that also constitutes a part of the frame.

[0055] The whole process of separating the pipes may be controlled manually, but the apparatus comprises in a preferred embodiment programmable control means for controlling the process, the control means comprising a programmable control part comprising a micro processor, a computer readable memory and a computer software program adapted for controlling the process, such as a Personal Computer with a suitable software program or a programmed PLC. The control means may further comprise a number of sensors for detecting the position of the pipe at various places, data communication means adapted for providing communication between the control part and motors, switches and/or valves that are used to regulate and control the various steps of the processes and/or data communication means adapted for providing communication between the control part and the sensors.

[0056] The method according to the invention of separating a pipe with the apparatus is described in the following. The pipe is placed on the conveyor unit 1 which moves a part, such as approximately 1.5 meters, into the separation region 2 that is located between the two pressing members 3, 5 each having a pressing surface 4, 6, respectively. The second pressing member 5 is moved towards the first pressing member 3 by means of the hydraulic pistons 7 until both pressing surfaces 4, 6 are in contact with the pipe. Then the pressing process begins in which the second pressing member 5 is pressed towards the first pressing member 3 by means of the hydraulic pistons 7 with a force of a magnitude sufficient to deform the pipe.

[0057] The inner tube, usually made from steel, of the pipe is during the pressing process permanently plastically deformed into a substantially flat member of which the original opening in the middle is substantially closed and the flat member obtains two substantially flat and substantially parallel sides. The outer, isolating layer of the pipe made from a foamed material is a brittle material that will break into smaller pieces and at least partly be crushed during the pressing process, whereby the outer layer is at least partially separated from the inner tube. The cells of the foamed material will, when the material is crushed, release their content of gasses that have been used as a blowing agent, such as CFC gas-

ses. Therefore, the process is preferably performed at a temperature above to boiling temperature of the gasses so as to remove as much gas as possible from the foamed material during the pressing process.

[0058] The ventilator is activated during the pressing process so that gasses, such as CFC gasses, that may be released from the foamed material during the pressing process is sucked from the separation region 2 and out through the filtering means 16 in which a substantial part of the released gasses are captured.

[0059] Thereafter, the part of the tube that have been pressed is moved out of the separation region 2 and through the two parts 12, 13 of the cutting means as the next part of the pipe is placed in the separation region 2. The hydraulic piston 14 for moving the second part 13 of the cutting means is activated and the pressed part of the pipe is cut from the remaining, non-pressed part of the pipe and is moved by means of the conveyors 16, 17 to the sorting station.

[0060] The sheath that the pipe may be equipped with on the outer side of the outer layer will often be broken into smaller pieces during the pressing process. However, the sheath is easily separated from the outer layer and the inner tube after the cutting step even if the sheath is still in one piece. The sheath may optionally be subjected to a secondary separation process, e.g. by rolling the sheath between two cylinders, in order to loosen parts of the outer layer that may stick to the sheath.

[0061] Optionally, cutting means are provided for tubes having a hard sheath, so that the sheath prior to the pressing step is opened with one or two longitudinal cuts so as to ease the pressing process, allow gasses to escape from the foam and the ease the separation of the sheath part from the pipe and foam parts after the pressing process. The cuts may be applied manually or automatically by means of knives, circular saws, etc.

[0062] Optionally, loosening means are further applied to the inner tube for loosening parts of the outer layer that may stick to the inner tube after the pressing process have been performed.

[0063] The foamed material may after the sorting process be recycled or disposed in a number of ways, e.g. by being combusted in a combustion plant at such high temperature that a remaining content of CFC gasses are destroyed.

[0064] The gasses contained in the filtering means may be recovered or destroyed together with the filtering means.

## Claims

1. A method of separating a pipe comprising an inner tube and at least one outer layer comprising the steps of

placing at least a part of the pipe between a first

- and a second pressing surface,  
approaching the two pressing surfaces towards  
each other until both pressing surfaces engage  
with the pipe, and  
pressing the two pressing surfaces further to-  
wards each other with a force of such magni-  
tude that the pipe is deformed whereby the at  
least one outer layer of the pipe is separated  
from the inner tube due to differences in the me-  
chanical properties of the outer layer and the  
inner tube.
2. A method according to claim 1, wherein the inner  
tube is a metal tube, such as a steel tube.
  3. A method according to claim 1 or 2, wherein the in-  
ner tube in the pressing step is permanently de-  
formed into a substantially flat member.
  4. A method according to any of claims 1-3 and further  
comprising the step of  
applying suction to the region where the sep-  
aration process is performed so as to remove a sub-  
stantial part of gasses that are released during the  
process.
  5. A method according to claim 4 and further compris-  
ing the step of  
passing the air that is sucked from the region  
where the separation process is performed through  
a filtering means so as to capture a substantial part  
of the gasses, that are released from the process  
and which are removed by suction, in the filtering  
means, so as to prevent the gasses from contami-  
nating the environment.
  6. A method according to any of the preceding claims  
and further subsequent to the pressing step com-  
prises the steps of  
moving the pressing surfaces away from each  
other so as to release the pipe from the press-  
ing surfaces,  
moving the part of the pipe that have been  
pressed away from the pressing surfaces,  
placing the pipe in cutting means, and  
cutting the pipe so as to separate the part of the  
pipe that have been pressed from the remain-  
ing part of the pipe.
  7. A method according to any of the preceding claims  
and further comprising the step of  
loosening remaining parts of the at least one  
outer layer of the pipe from the inner tube by apply-  
ing loosening means to the pipe.
  8. A method according to claim 7, wherein the loosen-  
ing means comprises two scrapers each comprising  
an edge and the loosening means are applied to the  
pipe by placing the edges of the scrapers on each  
side of the deformed inner tube abutting the tube  
sides where after the tube and the scrapers are  
moved relatively to each other.
  9. A method according to claim 7, wherein the loosen-  
ing means comprises brushes that may be rotated  
and the loosening means are applied to the pipe by  
rotating the brushes while the brushes are in con-  
tact with the part of the pipe that have been de-  
formed so as to remove remaining parts of the at  
least one outer layer from the inner tube.
  10. A method according to any of the preceding claims,  
wherein the outer layer of the pipe is at least partly  
made from a foamed material.
  11. A method according to claim 10, wherein the  
foamed material comprises polyurethane.
  12. A method according to claim 10 or 11, wherein the  
foamed material comprises a CFC gas which have  
been used as blowing agent and the gasses that  
may be released during the separation process  
comprises CFC gasses.
  13. An apparatus for separating pipes comprising an in-  
ner tube and at least one outer layer, the apparatus  
comprises  
a first pressing member having a first pressing  
surface,  
a second pressing member having a second  
pressing surface, the first and the second  
pressing surfaces being arranged during the  
separation process so that they substantially  
are facing each other,  
means adapted for moving the pressing mem-  
bers towards each other with a force of such a  
magnitude that a pipe placed between the  
pressing surfaces may be permanently de-  
formed, and  
suction means for removing a substantial part  
of the gasses that may be released during the  
separation process from the region around the  
pressing surfaces.
  14. An apparatus according to claim 13 and comprising  
a filtering means connected to the outlet of the suc-  
tion means, the filtering means being suitable for  
capturing a substantial part of the gasses that may  
be released during the separation process.
  15. An apparatus according to claim 14, wherein the fil-  
tering means are suitable for capturing CFC gas-  
ses.

16. An apparatus according to any of claims 13-15 and comprising a housing enclosing the pressing members and to which the intake of the suction means is connected so as to increase the efficiency of the process of removing a substantial part of the gases, that may be released during the separation process from the region around the pressing surfaces. 5
17. An apparatus according to any of claims 13-16 and comprising feeding means adapted for automatically feeding the pipe in between the pressing surfaces. 10
18. An apparatus according to any of claims 13-17 and comprising cutting means suitable for separating a pressed part of a pipe from a non-pressed part of a pipe. 15
19. An apparatus according to any of claims 13-18 and comprising loosening means suitable for removing parts of the outer layer of the pipe from the inner tube after the pressing process. 20
20. An apparatus according to claim 19, wherein the loosening means comprises two scrapers each with an edge, means for placing the two scrapers one on each side of and abutting the pressed part of the inner tube and means for moving the scrapers and the inner tube relatively to each other. 25 30
21. An apparatus according to claim 19, wherein the loosening means comprises brushes, means for rotating the brushes, means for placing the brushes on each side of the pressed part of the inner tube and means for moving the brushes and the inner tube relatively to each other. 35

40

45

50

55



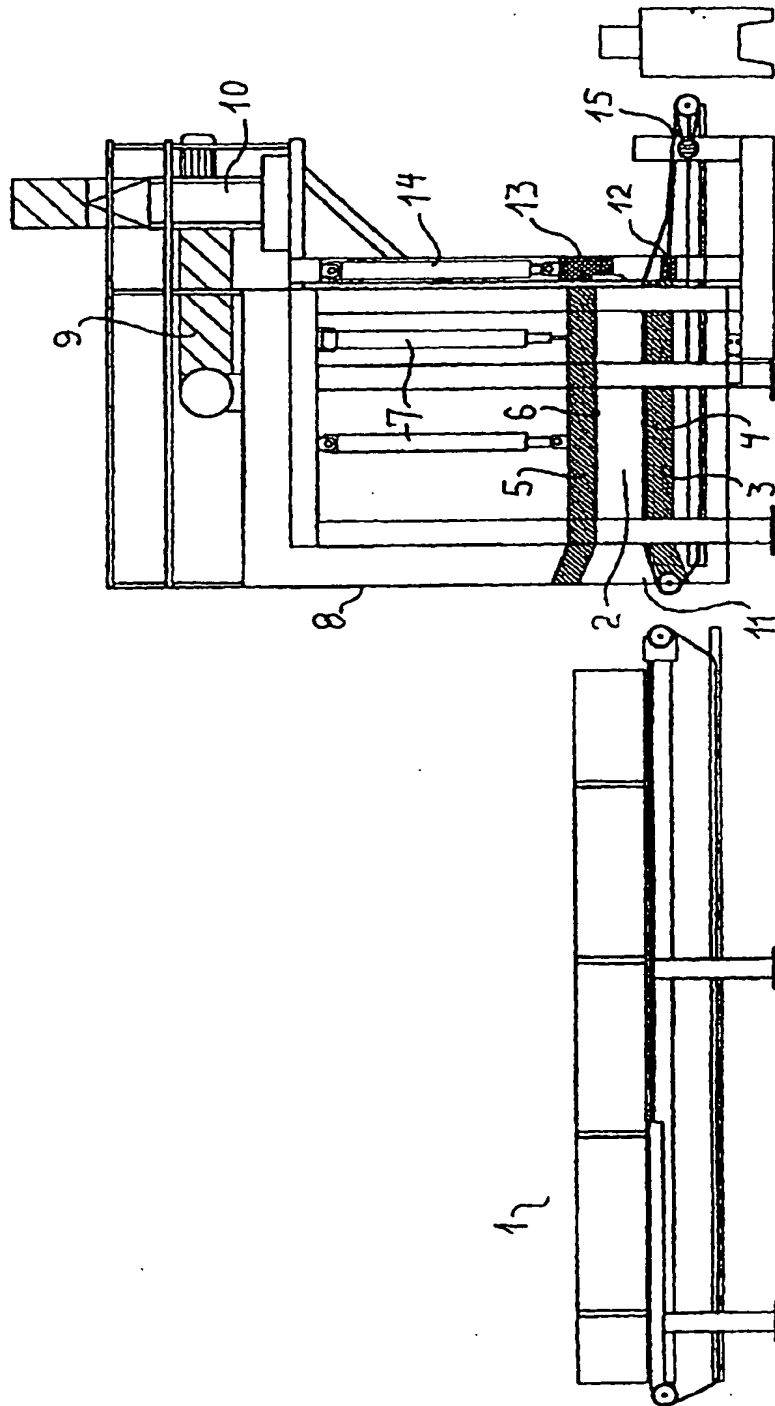


Fig. 1

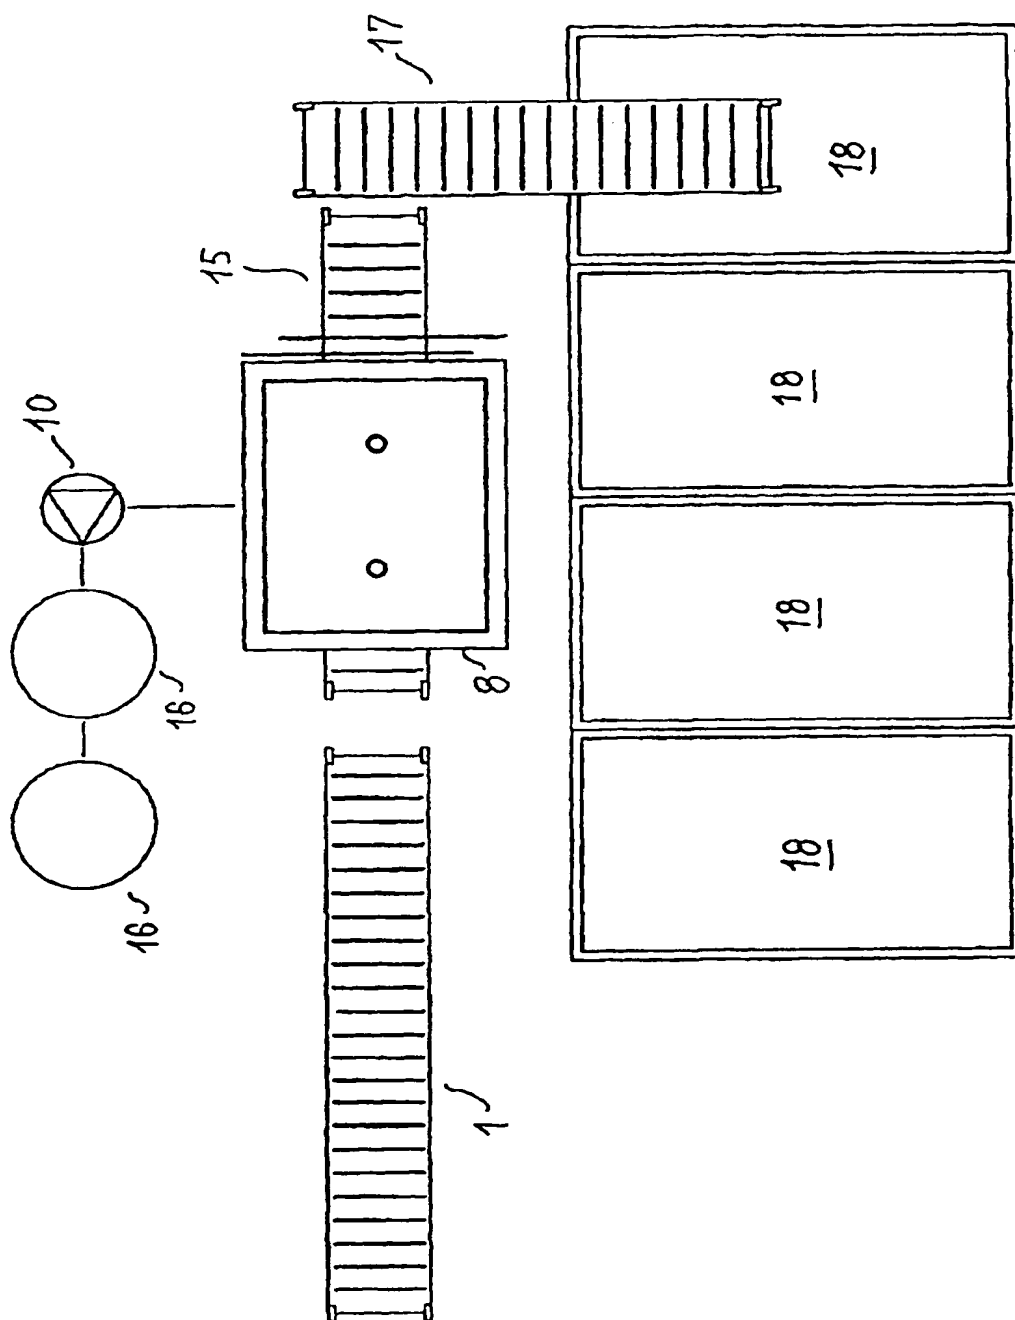


Fig. 2

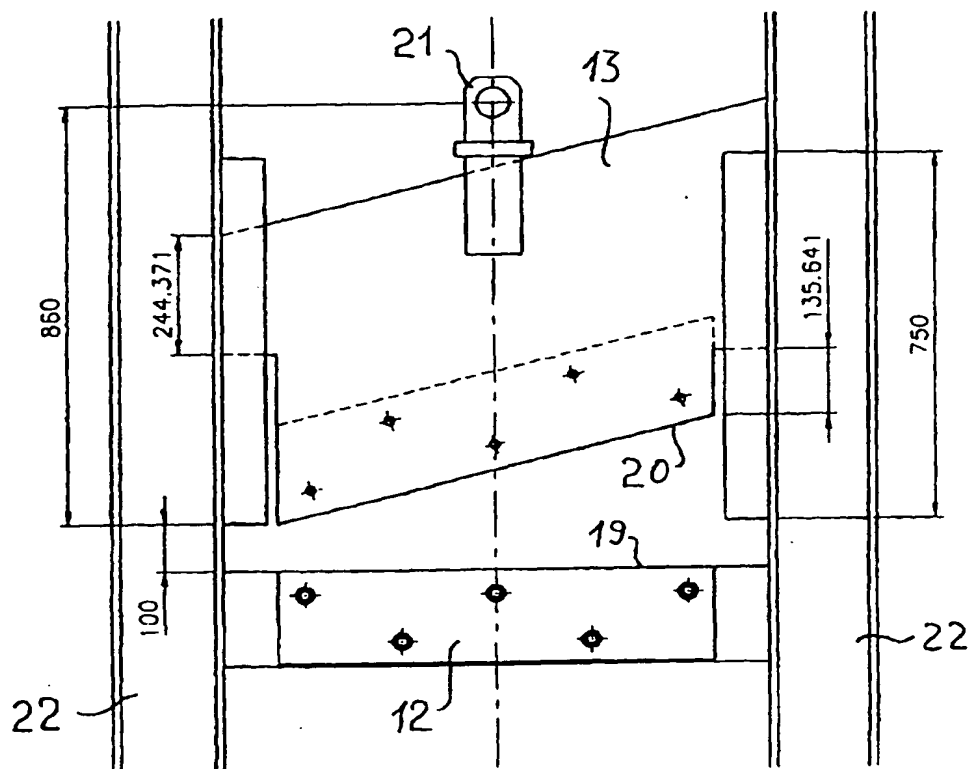


Fig. 3

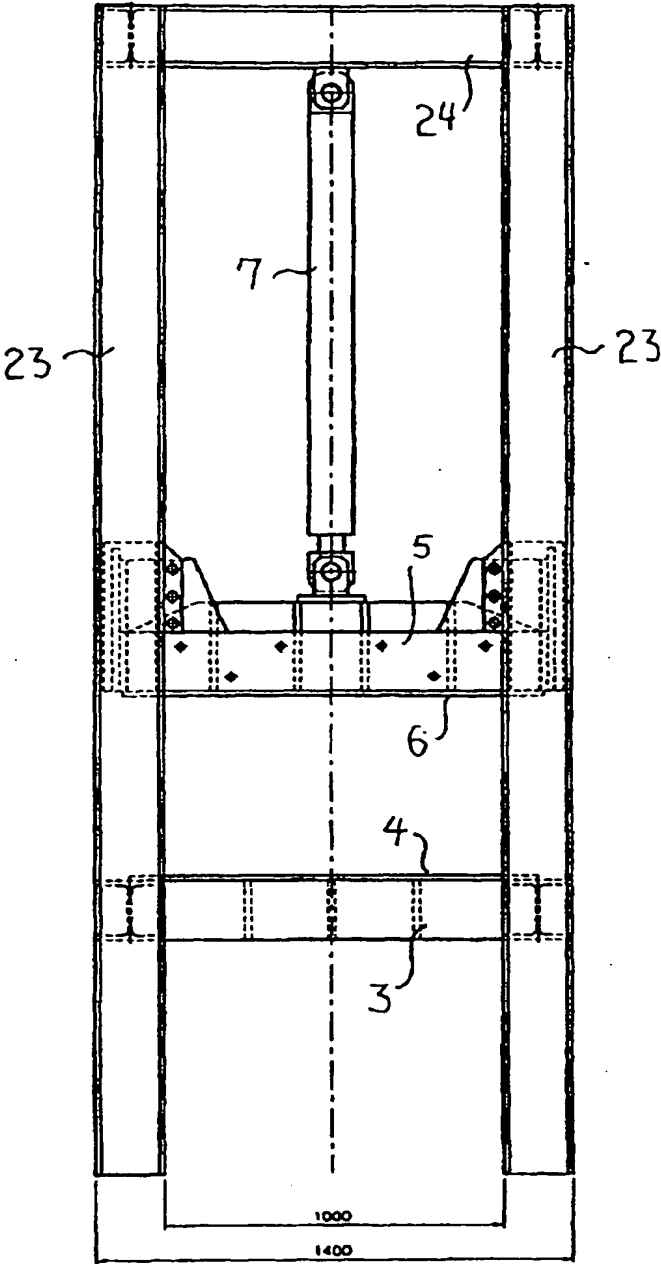


Fig. 4